



Gulf Emulsil NA Soluble Cutting Oil

Product Description

Gulf Emulsil NA is emulsifiable metalworking fluid suitable for moderate machining operations such turning, drilling and milling. It is formulated with high quality emulsifier that does not allow emulsion to separate even with water of high hardness. It also incorporates special biocide to increase life of the fluids besides preventing unpleasant odor due to microbial growth. It is environmental friendly as it is free from nitrite, phenol, nonyl phenol and heavy metals.

Features & Associated Benefits

Features	Associated Benefits
Superior emulsion stability	Longer sump life, less disposals, less top-ups
Good rust prevention characteristics	Longer life of machine-tools and work-pieces, reduced rejections
Resistance to microbial growth	Longer sump life, acceptability to operators
Environmental friendly	Acceptability to operators, easier disposal

Applications & Recommended Concentrations

Applications	Concentrations
Finishing Operations (Internal & External Grinding)	3-4%
General Machining (Turning, Chamfering, Counter-sinking)	4-6%
Heavy duty machining (Reaming, Tapping, Broaching)	6-10%

Specifications & Typical Properties

Specification	IS 1115-98 (Reaffirmed March 2002)	
Typical Properties		
Test Parameters	ASTM Method	Typical Values
Kinematic Viscosity at 40°C, cSt	D 445	22.3
Flash Point, °C, COC	D 92	162
Density @ 15 °C Kg/l	D 1298	0.8700
pH (5% emulsion in 200 ppM Hard Water)		9.3
Cast Iron Corrosion test (5% emulsion in 400 ppM Hard Water)	IS :1115 Annexure A	Passes
Emulsion stability	IS: 1448	Passes



Additional Information

To get the optimum results


- Always add oil to the water in specified concentration. Never add water to the oil.
- Use clean container for preparation of emulsion preferably of non-galvanized materials
- Optimum pH of the emulsion should be within the range of 8.7 and 9.3
- Bacterial Count of emulsion should be controlled below 10^5 colony forming unit/ml.
- Fungal concentration of emulsion should be restricted to 1000 organism/ml.
- Conductivity of emulsion should not exceed 4 milliSiemens/cm

Metal Compatibility

Ferrous Metals	Yes	Titanium	No
Yellow Metals	Yes	Magnesium	No
Aluminum	Yes		

Water quality for optimum life of cutting fluid

Water Hardness	Should range between 80 to 125 ppM of CaCO ₃
Sulphate Ions	100 ppM maximum
Chloride Ions	50 ppM maximum
Phosphate Ions	30 ppM maximum

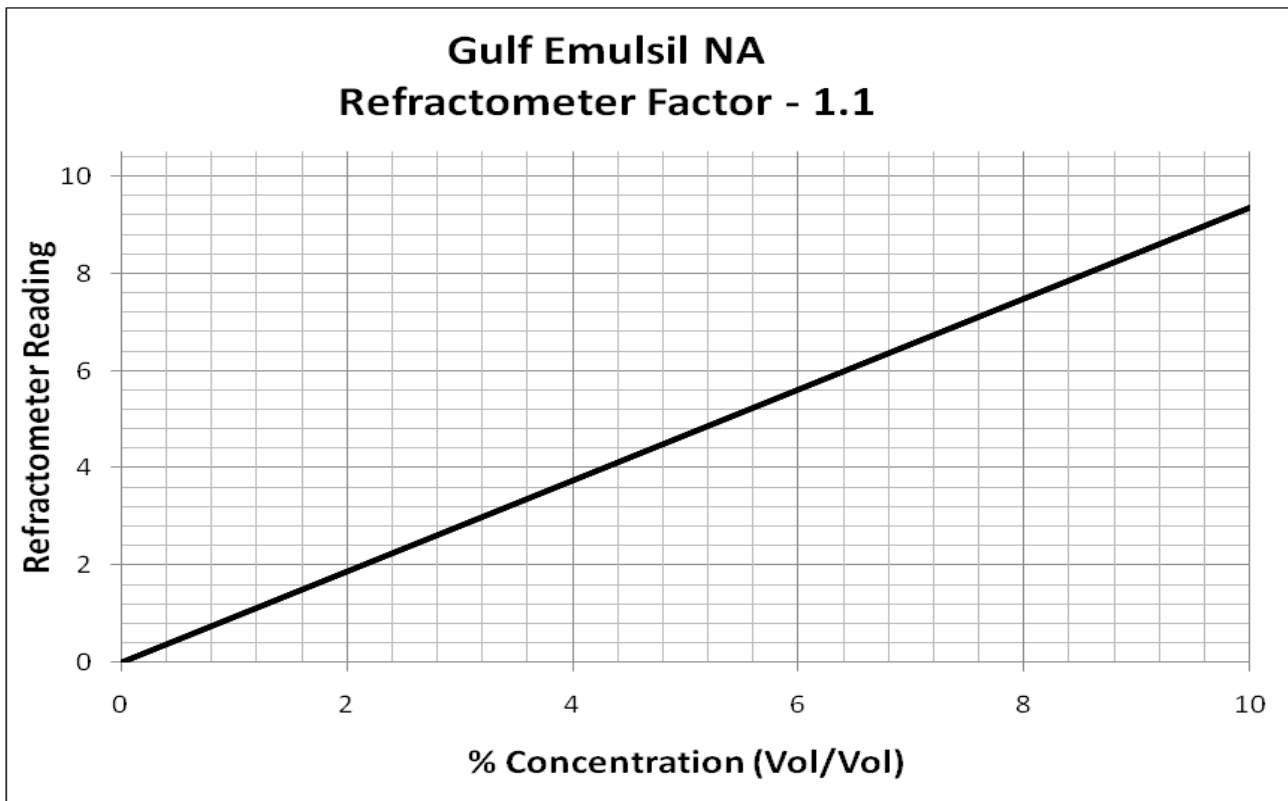

Properties mentioned above are typical only and minor variations, which do not affect the product performances, are to be expected in normal manufacturing. The above information is based on past history of the grade only and must not be construed as a guarantee of performance. Follow equipment manufacturer's recommendations for performance level and viscosity grade. The Material Safety Data Sheet for this product is available from your nearest Gulf Distributor.

Gulf Oil International

The information contained herein is believed to be correct at time of publication. No warranty expressed or implied is given concerning the accuracy of the information or the suitability of the products. Gulf Oil International reserves the right to modify and change its products and specifications without prior notice.

www.gulfoilltd.com



Top-up procedure to maintain specified concentration

- Observe refractometer reading of emulsion in the system following the standard operating procedure of using refractometer.
- Find out the concentration of emulsion in percentage (Vol/Vol) by reading through the above graph corresponding to Refractometer reading.
- Find out the fraction concentration as
$$t' = \{\text{Concentration of emulsion in percentage (Vol/Vol)}\}/100$$
- Find out the amount of quantity of oil to be added in liter as
$$q = \frac{[(t-t')*V]}{(1-t)}$$
where t = specified fraction concentration = {specified concentration in percentage (Vol/Vol) /100}
 V = Volume of sump in liter

Handling & Storage guidelines

- Refer Safety Data Sheets for Health and Safety related information.
- Used product to be disposed by referring to applicable statutory guidelines.
- Store preferably in in-door condition.
- Under normal storage conditions, the product should be consumed within 1 year for optimum performance.

August 2014